


AC Circuit Breaker

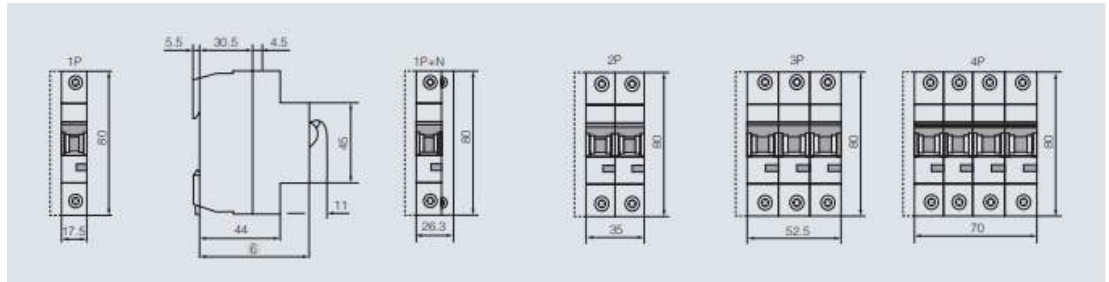

Type	SL7-63								
Pole	1P		2P		3P		4P		
Rated voltage (V)	230V				440V				
Rated current (A)	6	10	16	20	25	32	40	50	63
Norminal cross section to fit wire diameter (mm)	1	1.5	2.5		4	6	10		16
Ambient temperature	-5°C~+4°C								
Rated short circuit breaking capacity Icn	6000A								
Instantaneous release type	B		C			D			
Over current protection	3In<l ≤ 5In		5In<l ≤ 10In			10In<l ≤ 14In			

The Over-current Protection Property (1P~4P)

Release Type	B C D			
Current (A)	All	All	≤ 32	>32
Initial Status	Cold	Hot	Cold	Cold
Test Current(In)	1.13	1.45	2.55	2.55
Set Time	t ≥ 1h	t<1h	1s<t<60s	1s<t<120s
Expected Result	Non-Release	Release	Release	Release
Note	Current Smoothly Rises To specified Value Within 5s			